


SWIVEL CLEAT BASES

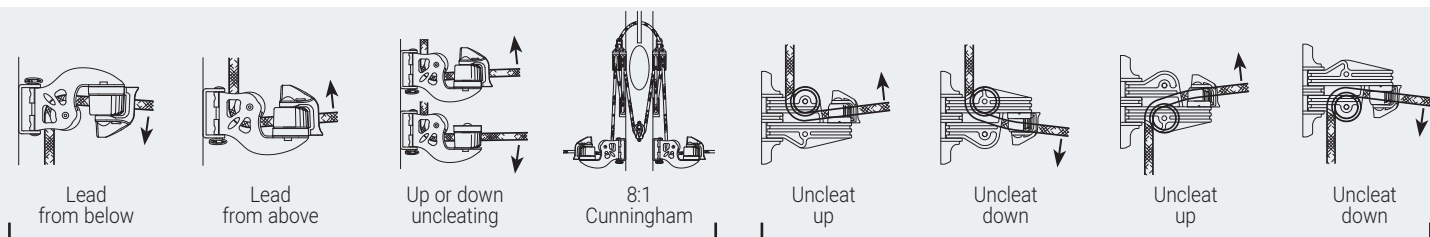

- ✓ Swivel cleat bases provide easy cleating and releasing from any angle.
- ✓ The RF60 features adjustable stops to limit rotation, which can be removed to allow full 360° rotation.
- ✓ Cleating plates are heavy gauge alloy for stiffness and minimum distortion under load.

- ✓ Deadeyes have flared stainless steel liners for minimum rope wear and long service life.
- ✓ The RF5 is manufactured in lightweight fibre reinforced composite materials – the position of the sheave can be changed for control line led from below.

- ⚙ Sheet leads and control lines on dinghies and catamarans.
- ⚙ Cunningham, vang, foreguy, pole topping lift and other control lines on larger yachts.
- ⚙ Alloy cleating arms.
- ⚙ Fibre reinforced nylon body (RF5).
- ⚙ Grade 316 stainless steel fixtures.

PRODUCT No.	DESCRIPTION	SUITS ROPE mm	WEIGHT g	SUITS ROPE in	WEIGHT oz
Swivel Cleat Bases					
RF4	Swivel shackle base. Suits Series 40 & 55 Orbit Block™ Dyneema® links. 4.8mm (3/16") diameter pin. MWL 250kg (550lb), BL 500kg (1100lb)	-	30	-	1.1
RF5	Swivelling deadeye & cleat unit. 28mm (1 1/8") diameter ball bearing sheave, small C-Cleat™ and fairlead. Maximum line load 125kg (275lb)	2 – 8	100	3/32 – 5/16	3.5
RF58	Swivelling deadeye & cleat unit. Aluminium arm, 360° rotation, medium C-Cleat™ & fairlead. Maximum line load 175kg (385lb)	3 – 12	171	1/8 – 1/2	6.0
RF60	Swivelling deadeye & cleat unit. Aluminium arm, adjustable rotation stops, medium C-Cleat™ & fairlead. Maximum line load 175kg (385lb)	3 – 12	257	1/8 – 1/2	9.1
RF67	Swivelling deadeye & cleat unit. Aluminium arm, 360° rotation, small C-Cleat™ & fairlead. Maximum line load 125kg (275lb)	2 – 8	121	3/32 – 5/16	4.3
RF70	Swivelling cleat unit, 15mm sheaves. Stainless steel arm, 360° rotation, small C-Cleat™ & fairlead. Maximum line load 125kg (275lb)	2 – 5	146	3/32 – 3/16	5.1
RF1455	Swivel base with block post socket. 4.8mm (3/16") diameter pin. Suits shackle head Series 40 & 50 Utility blocks and Series 55 Orbit Blocks™. MWL 200kg (440lb); BL 1000kg, (2200lb)	-	65	-	2.3
RF20175	Swivelling cleat unit. 20mm (3/4") sheave with stainless steel ball bearings, small C-Cleat™ & fairlead. Maximum line load 125kg (275lb)	2 – 6	79	3/32 – 1/4	2.8